

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>H04M 7/00, H04L 12/64</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 99/33250</b> <b>(43) International Publication Date:</b> 1 July 1999 (01.07.99)
<b>(21) International Application Number:</b> PCT/SE98/02395 <b>(22) International Filing Date:</b> 18 December 1998 (18.12.98) <b>(30) Priority Data:</b> 08/996,936 23 December 1997 (23.12.97) US <b>(71) Applicant:</b> TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE). <b>(72) Inventors:</b> ANDERSSON, Dick; Kastrupgatan 3, S-164 41 Kista (SE). KARLSSON, Torgny; Beckombergaavägen 13, 4409, S-168 54 Bromma (SE). <b>(74) Agent:</b> ERICSSON RADIO SYSTEMS AB; Common Patent Dept., S-164 80 Stockholm (SE).	<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>	

**(54) Title:** INTERNET PROTOCOL TELEPHONY FOR A MOBILE STATION ON A PACKET DATA CHANNEL

**(57) Abstract**

A method and apparatus are provided for effectuating voice communication between a mobile station (130) and a mobile radio network. A gateway (100) to the mobile radio network receives (300) an incoming voice call for a destination mobile station (130) and accesses (310, 315) information pertaining to the status and location of the destination mobile station (130). A determination is made (320) as to whether the destination mobile station is (130) capable of operation in a voice mode using circuit-switched communications across a traffic channel. If the destination mobile station (130) is operable in the voice mode, a circuit-switched communication on a traffic channel is established (330) between the mobile radio network and the destination mobile station (130). Otherwise, the incoming voice call is routed (340) to a voice gateway (200) which converts the voice call to data packets and routes the data packets to the mobile station (130) across an Internet Protocol communication network (190) to a packet gateway (210) of the mobile radio network. The packet gateway (210) routes the call across a packet data channel of the mobile radio network to the destination mobile station (130) using a packet data service.

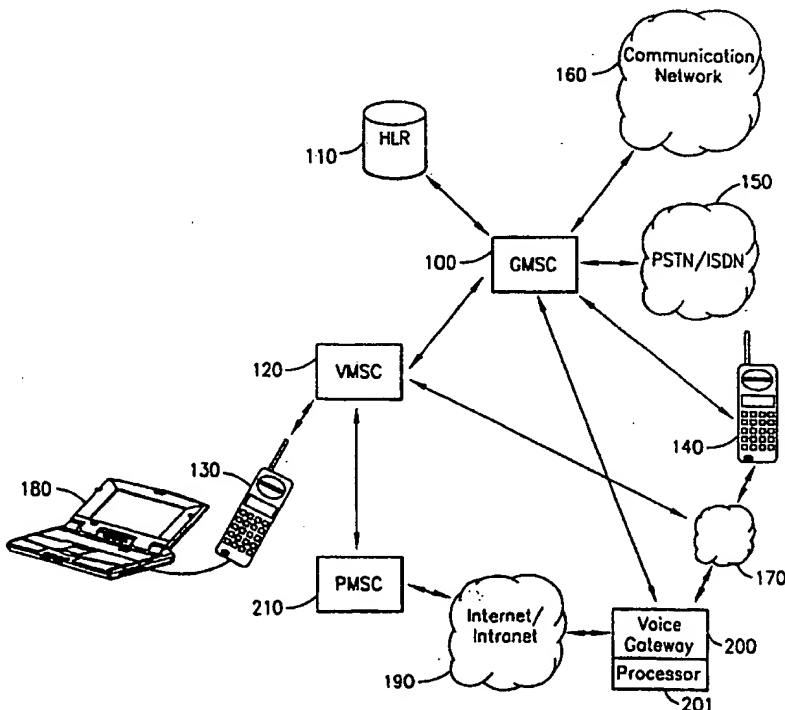

BEST AVAILABLE COPY

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## INTERNET PROTOCOL TELEPHONY FOR A MOBILE STATION ON A PACKET DATA CHANNEL

### BACKGROUND OF THE INVENTION

#### Technical Field of the Invention

5 The present invention pertains in general to routing of voice and data traffic in a mobile radio network and, more particularly, to a method and apparatus for routing voice telephone calls received by a mobile radio network to a destination mobile station via an Internet Protocol communication network on a data packet channel.

#### Description of the Related Art

10 In addition to voice communication, mobile radio networks are increasingly supporting packet data services. Frequently, packet data services are used to connect digital terminal equipment, such as a personal computer communicating through a mobile station operating in the mobile radio network, to an Internet Protocol (IP) communication network such as, for example, an Internet or an Intranet. While voice communication is typically carried across the mobile radio network using circuit-switched communications on a traffic channel, data packets associated with the packet  
15 data service are carried across the mobile radio network using packet-switched communications on a packet channel. For example, data packets can be carried on the packet channel using a Transmission Control Protocol/Internet Protocol (TCP/IP).

20 In certain situations, a mobile station is unable to support a voice connection using circuit-switched communications on the traffic channel. For example, the mobile station may be equipped to operate only in a packet mode using packet-switched communications on the packet channel, with no capability to communicate in a voice mode using circuit-switched communications on the traffic channel. In another example, the mobile station may be operating in the packet mode with the  
25 digital terminal equipment connected to the Internet/Intranet on the packet channel at the time when a voice connection to the mobile station is being attempted. In this situation, unless the mobile station is equipped to operate simultaneously in both the packet mode and voice mode, the mobile station needs to release the connection on the

- 2 -

packet channel and register on the traffic channel in order to communicate in the voice mode. In yet another example, all traffic channels available for voice communication with the mobile station may be in use and are, therefore, unavailable. In these and other similar situations, the mobile radio network is unable to provide voice communication with the mobile station.

It would be advantageous, therefore, to devise a method and apparatus for providing voice communication between a mobile station operating in a packet mode and a mobile radio network on a communication path other than a voice traffic channel. It would also be advantageous if such a method and apparatus routed the voice communication on a communication network other than the mobile radio network.

#### SUMMARY OF THE INVENTION

The present invention comprises a method and apparatus for effectuating voice communication between a mobile station and a mobile radio network. A gateway server to the mobile radio network receives an incoming voice call for a destination mobile station and accesses information pertaining the status and location of the destination mobile station. A determination is made as to whether the destination mobile station is capable of operation in a voice mode using circuit-switched communications across a traffic channel. If the destination mobile station is capable of operation in voice mode, a circuit-switched communication on a traffic channel is established between the mobile radio network and the destination mobile station. Otherwise, if the destination mobile station is not capable of operation in the voice mode and capable of supporting a packet switched communication on a packet channel, the incoming voice call is routed to a voice gateway server which converts the voice call to data packets, and routes the data packets to the mobile station across an IP communication network to a packet gateway server of the mobile radio network. The packet gateway server routes the call via a packet data channel of the mobile radio network to the destination mobile station using a packet data service.

## BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention, reference is made to the following detailed description taken in conjunction with the accompanying drawings wherein:

5       FIGURE 1 is a functional block diagram of an apparatus for effectuating voice communication between a mobile station and a mobile radio network consistent with a preferred embodiment of the present invention;

10       FIGURE 2 is a flow diagram of a method for receiving voice communication by a mobile station from a mobile radio network consistent with the embodiment described in Figure 1; and

      FIGURE 3 is a signaling sequence diagram for receiving voice communication by a mobile station from a mobile radio network.

## DETAILED DESCRIPTION OF THE INVENTION

15       Referring now to Figure 1, there is illustrated a functional block diagram of an apparatus for effectuating voice communication between a mobile station and a mobile radio network consistent with a preferred embodiment of the present invention. A cellular telephone network comprises a Gateway Mobile services Switching Center (GMSC) 100, a Home Location Register (HLR) 110, and a Visited Mobile services Switching Center (VMSC) 120. The mobile radio network communicates with a plurality of mobile stations, including a first mobile station 130 and a second mobile station 140, over an air interface in a manner conforming to any conventional mobile radio network protocol including, but not limited to, the Personal Digital Cellular system (PDC), the Global System for Mobile communications (GSM), Advanced Mobile Phone Service (AMPS) and Digital Advanced Mobile Phone Service (DAMPS), among others. Although any protocol may be used in accordance with the present invention, the PDC protocol is used by way of example in this disclosure.

20       The mobile radio network communicates with a Public Switched Telecommunication Network/Integrated Services Digital Network (PSTN/ISDN) 150 and other communication networks 160 via the GMSC 100. Although Fig. 1 depicts the second mobile station 140 as communicating with the mobile radio network via the GMSC 100, the second mobile station 140, alternatively, can connect to the mobile

30

- 4 -

radio network via other portions of the mobile radio network 170 and is routed within the mobile radio network in a manner consistent with the particular mobile radio network protocol currently in use.

To effectuate voice communication with a destination mobile station, which in this example is the first mobile station 130, incoming voice calls from the PSTN/ISDN 150 or other communication networks 160 are routed to the GMSC 100. The GMSC 100 requests routing information from the HLR 110 for routing the incoming voice call to the destination mobile station 130. The HLR 110 stores information pertaining to the destination mobile station 130 such as its operating mode, the identity of the VMSC 120 currently servicing the destination mobile station 130 and routing information to the destination mobile station 130. Using the routing information provided by the HLR 110, the GMSC 100 routes the incoming voice call to the VMSC 120 which communicates with the destination mobile station 130 using circuit-switched communications on the traffic channel.

To effectuate voice communication between the second mobile station 140 and the destination mobile station 130, incoming voice calls from the second mobile station 140 are routed to the GMSC 100 and handled in a manner consistent with that for incoming voice calls from the PSTN/ISDN 150. Alternatively, incoming voice calls from the second mobile station 140 are routed to the VMSC 120, and ultimately to the destination mobile station 130, via other portions of the mobile radio network 170 in a manner consistent with the particular mobile radio network protocol currently in use.

To effectuate communication between digital terminal equipment 180 such as, for example, a personal computer and an Internet/Intranet 190 or other Internet Protocol (IP) communication network using a packet data service, the digital terminal equipment 180 communicates with the mobile radio network via the mobile station 130. Packet data is communicated over the mobile radio network using packet-switched communications, such as TCP/IP, on a packet channel. Packet data is routed between the destination mobile station 130 and a Packet Mobile services Switching Center (PMSC) 210 via the VMSC 120 using a packet data service commonly known in the industry. The PMSC 210 interfaces the mobile radio network to the

- 5 -

Internet/Intranet 190 or other IP communication network in a manner also commonly known in the industry.

To effectuate an alternative communication link between the mobile radio network and the destination mobile station 130, a Voice Gateway 200, for example, a voice gateway server provides an interface between the GMSC 100 and the Internet/Intranet 190 or other IP communication network. Although the Voice Gateway 200 is depicted in Fig. 1, as being remote to both the GMSC 100 and the VMSC 120, the Voice Gateway 200 may, alternatively, be co-located with some other node in the network. Incoming voice telephone calls addressed to the destination mobile station 130 are received by the GMSC 100. The GMSC 100 requests routing information from the HLR 110 for routing the incoming voice telephone call to the destination mobile station 130, and determines whether the destination mobile station 130 is capable of operation in voice mode based on the information provided by the HLR 110. If the destination mobile station 130 is capable of operation in voice mode, the HLR 110 provides the GMSC 100 with a response containing a pursuit routing number to the VMSC 120 and the incoming call is routed to the destination mobile station 130 as a circuit-switched communications on the traffic channel. If, on the other hand, the destination mobile station is incapable of operation in voice mode and the destination mobile station 130 is capable of supporting a packet-switched communication on a packet channel, the response from the HLR 110 contains a pursuit routing number to the Voice Gateway 200. The pursuit routing number to the Voice Gateway 200 indicates that the destination mobile station 130 is incapable of operating in voice mode and the GMSC 100 routes the incoming voice call, along with the response from the HLR 110, to the Voice Gateway 200.

The identity of the destination mobile station 130 is mapped, either by look-up table or by calculation, by the HLR 110, the GMSC 100 or, alternatively, by a processor 201 associated with the Voice Gateway 200, to the current IP address assigned to the destination mobile station 130 used in the packet data connection. The Voice Gateway 200 routes the incoming voice call to the destination mobile station 130 based on its current IP address. The incoming voice call is, thus, routed between the Voice Gateway 200 and the PMSC 210 across the Internet/Intranet 190, and between the PMSC 200 and the destination mobile station 130 via the VMSC 120.

- 6 -

The IP connection across the Internet/Intranet 190 is set up using, for example, ITU-T H.323 protocol. The connection between the PMSC 210 and the destination mobile station 130 uses the packet data service provided by the mobile radio network.

5 The processor 201 in the Voice Gateway 200 also converts the incoming voice signal, typically a 64 kbps Pulse Code Modulation signal, received from the GMSC 100 to an IP telephony signal using, for example, ITU-T G.723.1 coding specification over a User Datagram Protocol/Internet Protocol at 5,300 bps or, alternatively, at 6,300 bps. As another example, if the incoming voice call originates from the second mobile station 140, the incoming voice signal can be coded according to the coding protocol  
10 used in the mobile network. This could, for example, be the Vector-Sum Excited Linear Predictive (VSELP) coding protocol used in PDC today. The Voice Gateway 200 converts this signal (VSLEP) to ITU-T G.723.1. Similarly, the processor 201 in the Voice Gateway 200 converts the IP telephony signal received across the Internet/Intranet 190 from the destination mobile station 130 to a voice signal  
15 compatible with the incoming voice signal. The incoming voice call, which is converted to the IP telephony signal, is received by the PMSC 210 from the Internet/Intranet 190 and is routed to the destination mobile station 130 using the packet data service provided by the mobile radio network.

Referring additionally now to Figures 2 and 3, there is illustrated a flow  
20 diagram of a method for receiving voice communication by a mobile station from a mobile radio network consistent with the embodiment described in Figure 1, and a signaling sequence diagram for receiving voice communication by a mobile station from a mobile radio network respectively. An incoming voice telephone call addressed to the destination mobile station 130, for example using a Mobile Subscriber  
25 Number (MSN) received by the GMSC 100 (step 300). The GMSC 100 requests routing information from the HLR 110 for routing the incoming voice telephone call to the destination mobile station 130 (step 310).

The GMSC 100 receives a response from the HLR 110 (step 315) and a determination is made by the GMSC 100 as to whether the destination mobile station  
30 130 is capable of establishing a circuit-switched communication on a traffic channel (step 320). If the destination mobile station 130 is capable of establishing a connection in voice mode, the HLR 100 provides the GMSC 100 with a response



- 7 -

containing a pursuit routing number to the VMSC 120 and the incoming call is routed to the destination mobile station 130 as a circuit-switched communication on the traffic channel (step 330). If, on the other hand, the destination mobile station is incapable of establishing a connection in voice mode and the destination mobile station 130 is capable of supporting a packet-switched communications on a packet channel, the response from the HLR 110 contains a pursuit routing number to the Voice Gateway 200. The pursuit routing number to the Voice Gateway 200 indicates that the destination mobile station 130 is incapable of operating in the voice mode and the GMSC 100 routes the incoming voice call, along with the response from the HLR 110, to the Voice Gateway 200 (step 340).

The identity of the destination mobile station 130 is mapped, either by look-up table or calculation, to the current IP address assigned to the destination mobile station 130 used in the packet data connection (step 350). The mapping function is performed by the HLR 110, the GMSC 100 or, alternatively, by the processor 201 in the Voice Gateway 200. The Voice Gateway 200 routes the incoming voice call to the destination mobile station 130 (step 360) based on its current IP address. The incoming voice call is, thus, routed between the Voice Gateway 200 and the PMSC 210 across the Internet/Intranet 190 (step 360a), and between the PMSC 200 and the destination mobile station 130 via the VMSC 120 (step 360b). The IP connection across the Intranet/Intranet 190 is set up using, for example, the ITU-T H.323 protocol.

The processor 201 associated with the Voice Gateway 200 also converts the incoming voice signal, typically a 64 kbps Pulse Code Modulation (PCM) signal, received from the GMSC 100 to an IP telephony signal using, for example, ITU-T G.723.1 specified speech coding over a User Datagram Protocol/Internet Protocol at 5,300 bps or, alternatively, at 6,300 bps (step 370). This could, for example, be the Vector-Sum Excited Linear Predictive (VSELP) coding protocol used in PDC today. The Voice Gateway 200 converts this signal (VSLEP) to ITU-T G.723.1. Similarly, the Voice Gateway 200 converts the IP telephony signal received across the Internet/Intranet 190 from the destination mobile station 130 to a voice signal compatible with the incoming voice signal. The incoming voice call, which is converted to the IP telephony signal, is received by the PMSC 210 from the

- 8 -

Internet/Intranet 190 and is routed to the destination mobile station 130 using the packet data service provided by the mobile radio network.

5. Although the preferred embodiment of the apparatus and method of the present invention has been illustrated in the accompanying Drawings and described in the foregoing Detailed Description, it is understood that the invention is not limited to the embodiment disclosed, but is capable of numerous rearrangements, modifications and substitutions without departing from the spirit of the invention as set forth and defined by the following claims.

- 9 -

## WHAT IS CLAIMED IS:

1. An apparatus for effectuating voice communication between a mobile station and a mobile radio network, comprising:

a voice gateway for receiving an incoming voice call from said mobile radio network; and

a processor for communicating said voice call across an Internet Protocol communication network to a packet data gateway, said packet data gateway having a communication link to said mobile station.

2. The apparatus recited in Claim 1, wherein said voice gateway sets up a call to said mobile station.

3. The apparatus recited in Claim 2, wherein said voice gateway sets up said call to said mobile station using ITU-T H.323 protocol.

4. The apparatus recited in Claim 1, further comprising:  
means for converting said incoming voice call from a voice format to an Internet Protocol telephony format; and  
means for converting packet data received across said Internet Protocol communication network from said mobile station from said Internet Protocol telephony format to said voice format.

5. The apparatus recited in Claim 4, wherein said means for converting said incoming voice call from a voice format to an Internet Protocol telephony format comprises said processor for converting said incoming voice call from an incoming 64 kbps PCM signal to an outgoing 5,300 bps ITU-T G.723.1 protocol signal and further, wherein said means for converting packet data received across said Internet Protocol communication network from said mobile station from said Internet Protocol telephony format to said voice format comprises said processor for converting packet data received across said Internet Protocol communication network from an incoming 5,300 bps ITU-T G.723.1 protocol signal to an outgoing 64 kbps PCM signal.

- 10 -

6. The apparatus recited in Claim 4, wherein said means for converting said incoming voice call from a voice format to an Internet Protocol telephony format comprises said processor for converting said incoming voice call from an incoming 64 kbps PCM signal to an outgoing 6,300 bps ITU-T G.723.1 protocol signal and further, wherein said means for converting packet data received across said Internet Protocol communication network from said mobile station from said Internet Protocol telephony format to said voice format comprises said processor for converting packet data received across said Internet Protocol communication network from an incoming 6,300 bps ITU-T G.723.1 protocol signal to an outgoing 64 kbps PCM signal.

7. The apparatus recited in Claim 1, wherein said Internet Protocol communication network is an Internet.

8. The apparatus recited in Claim 1, wherein said Internet Protocol communication network is an Intranet.

9. A method for effectuating voice communication between a mobile station and a mobile radio network comprising the steps of:

receiving an incoming voice call;

determining if said mobile station is capable of operation in a voice mode;

establishing a circuit-switched communication on a traffic channel of said mobile radio network if said mobile station is capable of operation in said voice mode; and

routing said incoming voice call to said mobile station across an Internet Protocol communication network and a packet data channel of said mobile radio network if said mobile station is incapable of operation in said voice mode.

- 11 -

10. The method recited in Claim 9, wherein the step of determining if said mobile station is capable of operation in said voice mode comprises the steps of:

requesting routing information for routing said incoming voice call to said mobile station;

5 identifying said mobile station as operable in said voice mode if a response to said request contains a first pursuit routing number to a VMSC; and

identifying said mobile station as inoperable in said voice mode if said response contains a second pursuit routing number to a Voice Gateway.

11. The method recited in Claim 10, wherein said step of routing said incoming voice call to said mobile station comprises the steps of:

routing said incoming voice call to a voice gateway;

mapping said mobile station to an Internet Protocol address;

setting up a call between said voice gateway and said mobile station located at said Internet Protocol address; and

15 communicating between said voice gateway and said mobile station.

12. The method recited in Claim 11, wherein the step of communicating between said voice gateway and said mobile station comprises the steps of:


converting said incoming voice call from a voice format to an Internet Protocol telephony format; and

20 converting packet data received across said Internet Protocol communication network sent by said mobile station from said Internet Protocol telephony format to said voice format.

13. The method recited in Claim 11, wherein the step of communicating between said voice gateway and said mobile station comprises the steps of:

25 communicating between said voice gateway and a packet data gateway across an Internet; and

communicating between said packet data gateway and said mobile station via a packet data service of said mobile radio network.

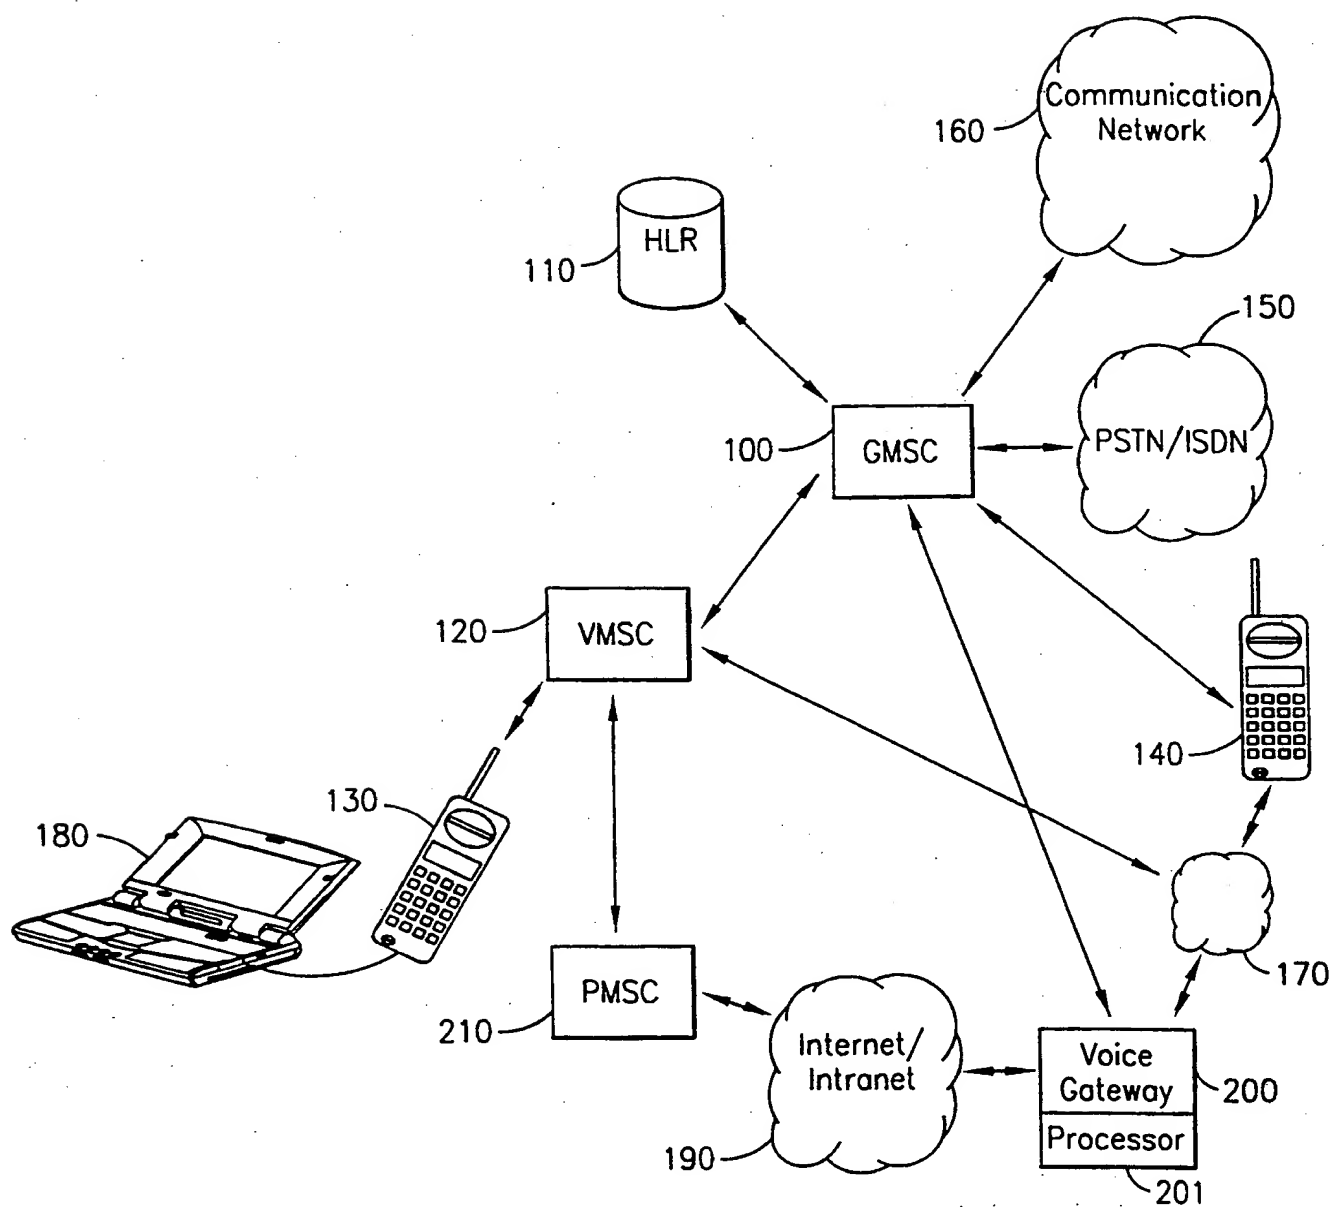**FIG. 1**

2/3

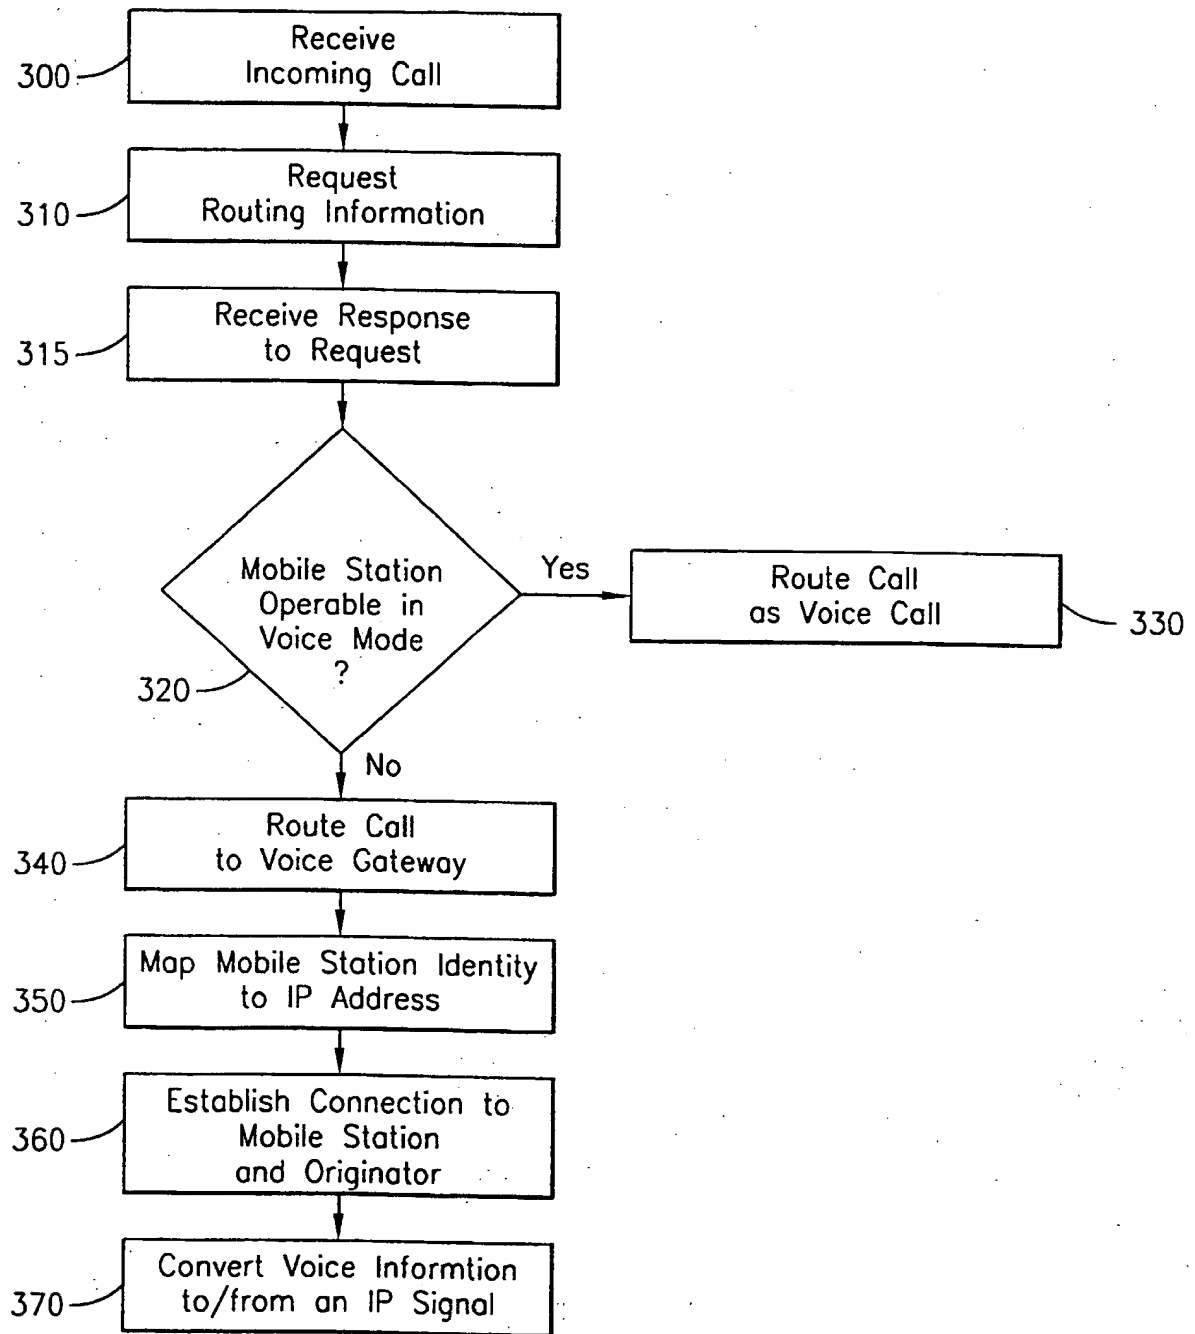


FIG. 2

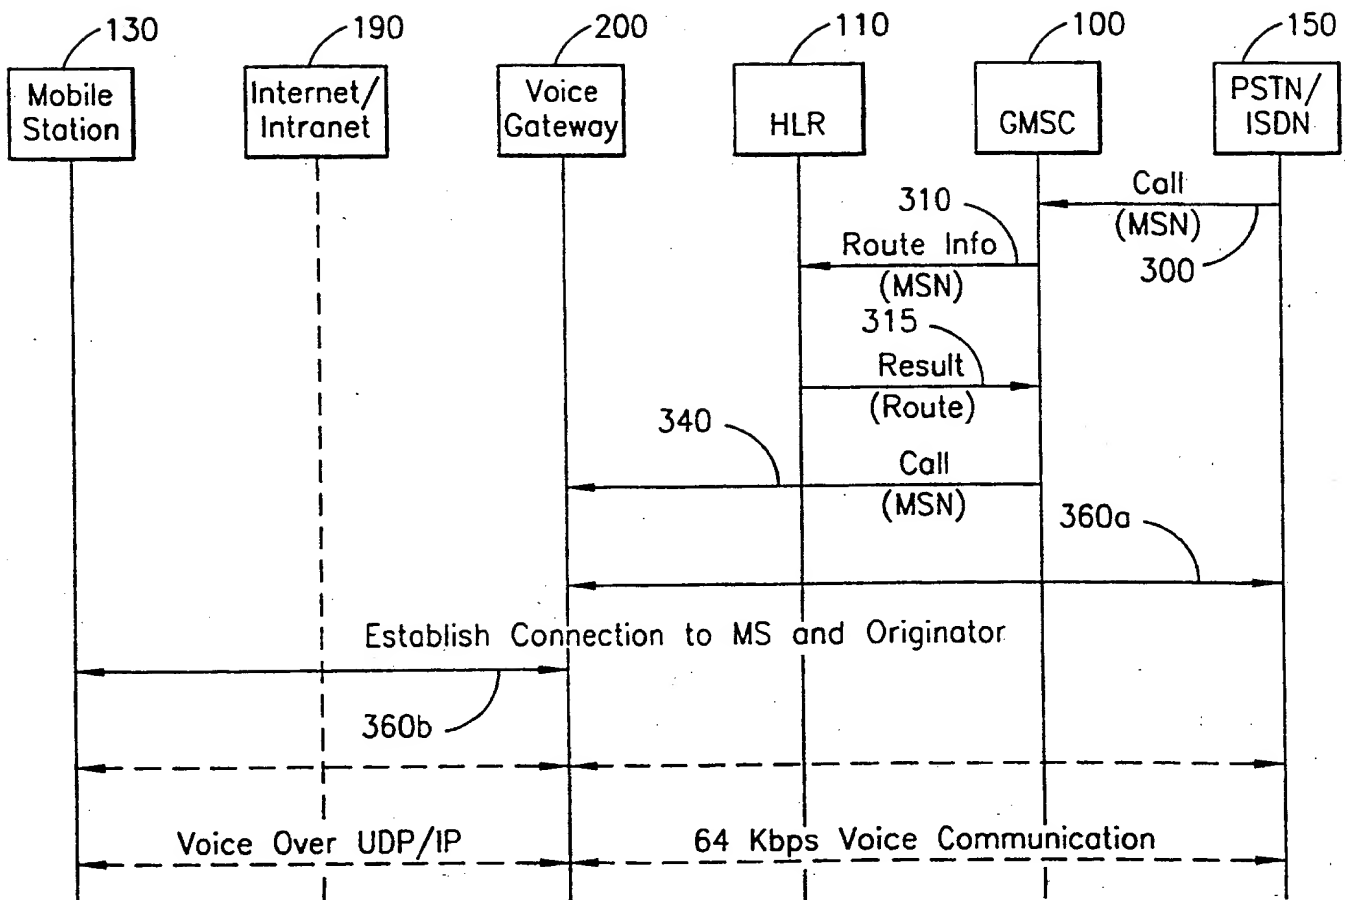


FIG. 3



# INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 98/02395

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 H04M7/00 H04L12/64

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04M H04Q H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 766 490 A (NOKIA MOBILE PHONES LTD) 2 April 1997	1-4,7
A	see abstract see page 4, line 5 - page 5, line 53 see figure 1	9-13
A	EP 0 779 759 A (UNWIRED PLANET INC) 18 June 1997 see page 4, line 42 - page 5, line 8 see page 8, line 59 - page 10, line 31	1-13
A	HANSSON A ET AL: "PHONE DOUBLER - A STEP TOWARDS INTEGRATED INTERNET AND TELEPHONE COMMUNITIES" ERICSSON REVIEW, no. 4, 1997, pages 142-151, XP000725693 see the whole document	1-13
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

8 April 1999

Date of mailing of the international search report

15/04/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Megalou, M

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 98/02395

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 604 737 A (IWAMI NAKO ET AL) 18 February 1997 see abstract ----	1-13
A	WO 97 29581 A (LINK WORLDWIDE INC I) 14 August 1997 see abstract see page 6, line 1 - page 8, line 7 ----	1-13
A	WO 95 31060 A (MOTOROLA INC) 16 November 1995 see the whole document see page 1, line 55 - page 5, line 54 ----	1-13
A	WO 97 16007 A (SAKSANEN PAULI ; FINLAND TELECOM OY (FI); KARHAPAEAE TUOMO (FI)) 1 May 1997 see abstract see example 1 ----	1-13
A	THOM G A: "H. 323: THE MULTIMEDIA COMMUNICATIONS STANDARD FOR LOCAL AREA NETWORKS" IEEE COMMUNICATIONS MAGAZINE, vol. 34, no. 12, December 1996, pages 52-56, XP000636454 see the whole document ----	3
A	US H1641 H (SHARMAN DUANE R) 1 April 1997 see the whole document -----	1-13

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SE 98/02395

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
EP 0766490	A	02-04-1997	FI	954639 A	30-03-1997
			JP	9130405 A	16-05-1997
EP 0779759	A	18-06-1997	US	5809415 A	15-09-1998
			JP	10011383 A	16-01-1998
US 5604737	A	18-02-1997	JP	7170288 A	04-07-1995
WO 9729581	A	14-08-1997	AU	2251497 A	28-08-1997
			CA	2245815 A	14-08-1997
			EP	0878086 A	18-11-1998
WO 9531060	A	16-11-1995	US	5729544 A	17-03-1998
			AU	2128995 A	29-11-1995
			ZA	9503607 A	03-01-1996
WO 9716007	A	01-05-1997	AU	7302596 A	15-05-1997
			FI	955810 A	26-04-1997
US H1641	H	01-04-1997	CA	2131349 A	31-05-1995

**THIS PAGE BLANK (USPTO)**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**